


3712KPM Industrial PCs

12.1" LCD Flat Panel Display

DS-371200(F)

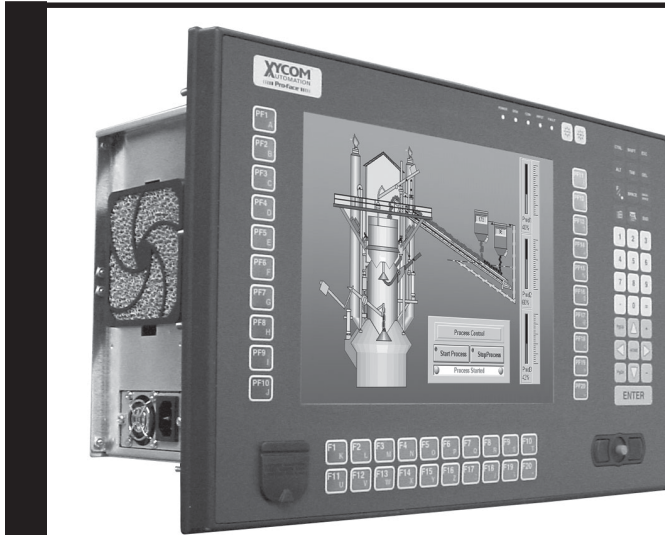

Xycom Automation's newest generation of Industrial PCs is designed and tested for the tough environments required for plant floor use. Our standard PC configurations meet the strict specifications required for use in Hazardous Locations and Europe's CE mark. Based on CPU boards designed specifically for industrial automation, these systems provide the capabilities required by demanding applications. With an installed base of over 200,000 systems, our Industrial PC products are successfully applied in manufacturing and process environments world-wide.

FEATURES

- 12.1" SVGA TFT color flat panel
- Choice of operator input options:
 - Reprogrammable keypad with integrated mouse, or
 - Combination of keypad, mouse & touchscreen
- Intel® Pentium® III options up to 1.26 GHz
- Up to 512 MB DRAM (256 MB standard)
- 10/100 Base T Ethernet port
- Parallel, RS-232 and RS-232 or RS485, PS/2 keyboard and mouse ports
- USB ports (1.1 compliant)
 - 2 rear-access
 - 1 front-access
- VGA port (supports simultaneous display with additional monitor)
- Four available expansion slots:
 - Three full-length (1 PCI, 1 ISA, and 1 either ISA or PCI)
 - One ½-length PCI
- DiskOnChip 2000 socket
- AGP graphics controller with 4 MB base memory
- Floppy drive and CD-ROM drive (with CD-R/W, DVD, or DVD-R/W upgrade options)
- Easily removable 20 GB hard drive
- Secondary IDE Drive options (choice of one):
 - Dual hard drives
 - Externally accessible CompactFlash™ options up to 512MB
 - External Drive bay connector for 9000-XBAY
- NEMA 4/4x/12 and IP65 front panels
- UL listed for hazardous locations: Class I Division 2, Groups A, B, C, D; Class II Division 2, Groups F and G (DVD drive options not approved for hazardous locations); Temp. Code T4A
- Pre-loaded with MS-DOS®, Windows® NT, Windows® 2000 (with multi-language support), or Windows® XP
- 100-240 V AC power supply (24VDC optional)
- 2-year warranty included

Easy-to-Read Display

The 3712KPM units utilize a bright TFT 12.1" LCD flat panel display. Complex operations and screens can be displayed with clarity. SVGA (800 x 600) resolution is recommended. However, the 3712KPM units will display XGA (1024 x 768) resolution with some clarity degradation. The AGP graphics defaults to 4MB video RAM and will automatically share RAM (up to 32 MB) with the system to allow full 32-bit color depth.

Higher Performance

With up to 1.26 GHz Pentium® III processors available, the 3712KPM units can drive the most demanding applications. The 3712KPM units ship standard with a Pentium III 1 GHz with 256K cache running at 133 MHz bus. A 1.26 GHz Pentium® III with 512K cache running at 133 MHz bus is an available option.

Cutout Compatibility

The 3712KPM is directly cutout-compatible with many Xycom Automation legacy units. It offers a hardware upgrade path for many units, including the 2050, 8450, 9450, 9475, 9485, 9486, 9486 and the 9487 without the need to alter your current enclosure and/or machine. For a more complete list, or to verify compatibility, contact Xycom Customer Care.

Fits Your Needs

The 3712KPM can be configured many different ways. With four available expansion slots (three full-length ISA/PCI, one ½-length PCI), many cost-effective, industry standard options are easily integrated. The optional dual hard drive, solid-state drive, externally accessible CompactFlash™, or External Drive bay connector provide the storage solution you require. Additionally, the

CD-ROM can be upgraded to CD-R/W, DVD, or DVD-R/W, so that even more storage and/or backup options are available. The optional 9000-XBAY allows you to externally mount any two IDE devices without requiring a power supply or unreliable cabling.


Meets High Standards

To survive on the plant floor, the 3712KPM units meet NEMA 4/4x/12, IP65, FCC, UL, CSA, and European CE mark requirements for industrial automation equipment. Xycom Automation leads the industry in reliability, service, and support with an optional five year warranty available.



SERVICEABILITY

The 3712KPM CPU section easily removes from the front panel and display unit, without having to detach the front panel from the NEMA enclosure. One electrical connection is used to attach the entire front panel to the rear CPU section. The rear CPU section can be replaced with another very quickly. With the cover removed, expansion cards are easily installed without cumbersome cables to contend with.

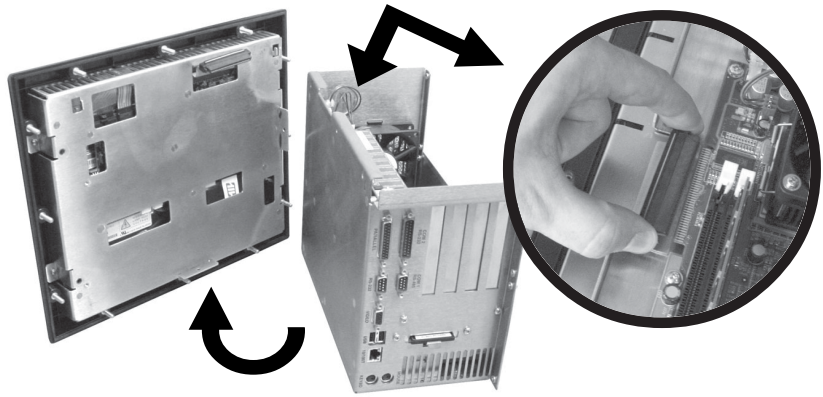


EASILY REPLACEABLE HARD DRIVE




The 3712KPM units have incorporated an easy to access hard drive mount. Simply remove 2 screws and extract the hard drive. Remove the metal bracket and retention spring, attach it to the new hard drive and install your replacement.

SECONDARY DRIVE OPTIONS


The 3712KPM units have several options for the secondary IDE port on the CPU. The hard drive can be replaced with a dual hard drive unit. If solid state storage media is desired, then an externally accessible Type I or Type II CompactFlash™ option is available. If a DVD, tape backup, or other IDE device is required, then an external connector for a remote drive bay can be ordered.



External Bay Connector



Dual 2.5" Hard Drives

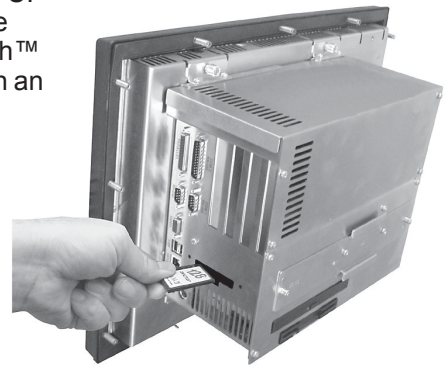

Externally Accessible CompactFlash™

REMOTE DRIVES



With the external bay connector (shown above) installed, the 9000-XBAY* can be utilized. The 9000-XBAY allows any two IDE devices to be installed and connected to the 3712KPM unit via a single cable. The 9000-XBAY can be mounted on a shelf, behind a panel, or used with a NEMA door (optional).


*9000-XBAY sold separately.

PRODUCT CONFIGURATIONS


3712KPM(T) Configuration

Display	12.1" LCD color display, 800 x 600 (SVGA), 300 nits
Operator Input	Reprogrammable 74-position keypad and industrial mouse (Touchscreen optional)
Processors	Intel® Pentium® III
Preloaded OS	MS-DOS®, Windows NT®, Windows® 2000, Windows® XP
Expansion	One ISA; one full-length and one ½-length PCI; one shared (ISA or PCI)

PRODUCT MOUNTING

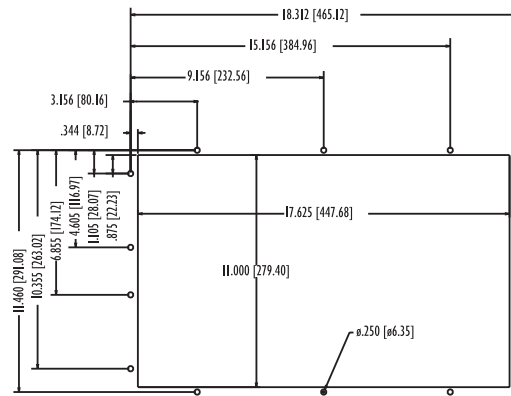

PRODUCT DIMENSIONS

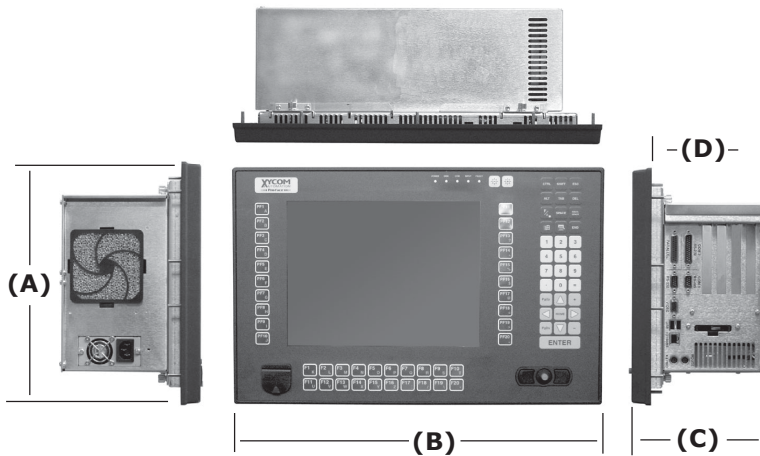

3712KPM(T) Unit Dimensions

Model	3712KPM(T)
Height (A)	12.2" (310 mm)
Width (B)	19.00" (482.6 mm)
Depth (C)	7.64" (194.0 mm)
Mounting Depth (D)	6.64" (168.6 mm)
Weight	29 lbs (16.8 kg)

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

	Operating	Nonoperating
Thermal	0°C to 50°C	-20°C to 60°C
Humidity	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
Shock ^a	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
Vibration 5-2000 Hz ^a	.006" peak to peak displacement 1.0g maximum acceleration	.015" peak to peak displacement 2.5g maximum acceleration
Altitude ^b	Sea level to 10,000 ft.	Sea level to 40,000 ft.

^a These values are with solid state hard drives, and not rotating media drives.

^b Consistent with internal component specifications.

Electrical

AC Power Supply	200 watt AC
AC Power	100 - 240V AC, 50-60 Hz, 5.0 Amps (maximum) 95 W nominal power [†]
Power Available for Expansion	+3.3V@10A max ^a +5V@6A max ^a -5@.2A max ^b -12@.5A max ^b +12@4.9A max

^a +5V and +3.3V combined cannot exceed 36 watts.

^b -5V and -12V combined cannot exceed 8 watts.

DC Power Supply	300 watt DC
DC Power	19 - 36VDC 20.0 Amps (maximum) 100 W nominal power [†]
Power Available for Expansion	+3.3V@9A max +5V@7A max -5@0.54A max ^a -12@0.7A max ^a +12@8A max

^a -5V and -12V combined cannot exceed 20 amps.

[†] Nominal Power is measured for a base configuration only. Any additional expansion and/or devices will increase the input power required.

PRODUCT SPECIFICATIONS AND RATINGS (CONTINUED)

Compliance

Regulatory Compliance

- CE**
- EN 55022: Class A
 - EN 61000-6-2
 - IEC 60950-1
 - EN 61000-3-2, Class A
 - EN 61000-3-3
- FCC**
- 47 CFR, Part 15, Class A

Safety Agency Approvals

- UL**
- UL 508 Listed
 - UL 1604 Listed ^{a,b}
- cUL**
- CSA-C22.2, #142 Listed
 - CSA-C22.2, #213 Listed ^{a,b}

Front Panel

- NEMA 4/4X/12, IP65



All agency approvals are pending for DC voltages

^a Class I Division 2, Groups A, B, C, D; Class II, Division 2, Groups F and G; Temp. Code: T4A

^b DVD Drives are not supported for hazardous locations.

ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

Example Order Number

Order Number	Description
3712KPM-1000-256-CDF-2K	3712KPMT with keypad & mouse front panel, Intel® Pentium III 1 GHz CPU, 256 MB DRAM, 20 GB minimum Hard Drive, Rear Access CD-ROM and Floppy, Windows 2000.

3712 -

Operator Input

- KPM 12.1" TFT with keypad and mouse
- KPMT 12.1" TFT with keypad, mouse and touchscreen

CPU

- 1000 Pentium III 1.0 GHz, 256k Cache, 133 MHz Bus
- 1260 Pentium III 1.26 GHz, 512k Cache, 133 MHz Bus

DRAM

- 256 256 MB DRAM
- 512 512 MB DRAM

Power Supply

- blank AC power supply
- 24V 24V DC power supply

Internal Hard Drive

- Blank Internal 3.5" 20 GB minimum EIDE hard drive
- 40G 40 GB internal EIDE hard drive
- ND No internal hard drive^a
- DHD Dual 2.5" 10 GB minimum hard drives
- 3GSS 3 GB solid state hard drive^b

Rotating Media Devices

- CDF Rear Access Floppy and CD-ROM
- CDWF Rear Access Floppy and Read/Write CD-ROM^c
- F Rear Access Floppy only
- DVDF Rear Access Floppy and DVD-ROM Drive^c
- DVDWFRear Access Floppy and Read/Write DVD-ROM Drive^{c f}

Externally Accessible IDE^d

- blank Nothing Installed
- CF Externally Accessible Type I/II CompactFlash site
- 128CF Externally Accessible Type I/II CompactFlash site w/128 MB
- 256CF Externally Accessible Type I/II CompactFlash site w/256 MB
- 512CF Externally Accessible Type I/II CompactFlash site w/512 MB
- XBAY Connector for use with 9000-XBAY or 9000-XBAY-FP

Operating System

- DOS MS-DOS
- NT Windows NT^e
- 2K Windows 2000 (multi-language)^e
- XP Pre-Activated Windows XP^e

^a 128CF, 256CF, or 512CF (with DOS) option must be chosen when selecting the -ND option ^bNot recommended when applications are storing data ^cWhen ordering -CDWF, -DVDF, -DVDWFR options with MS-DOS, drivers will not be loaded and devices will not function properly (requires Windows). ^dExternally accessible options are not available when choosing -DHD option. ^eWindows operating systems are only available when Internal Hard Drive or -DHD options are chosen. ^fHazardous locations approvals do not apply when configured with a DVD-R/W drive option.

Warranty Information

The 3712 series carries a two-year parts & labor warranty.

Important Notice for XP configurations:

Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCT ACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

Xycom Automation, Inc.
750 North Maple Rd.
Saline, MI 48176-1292

Phone: 734-429-4971
Fax: 734-429-1010
<http://www.xycom.com>

Customer Support Hotline:
734-944-0482

