


RMC-4S-2

| Applications |
|--------------------------------|
| Internet Server (Web / Mail) |
| File Server |
| NAS / iSCSI |
| Military Application |
| Industrial / Telecom Computers |

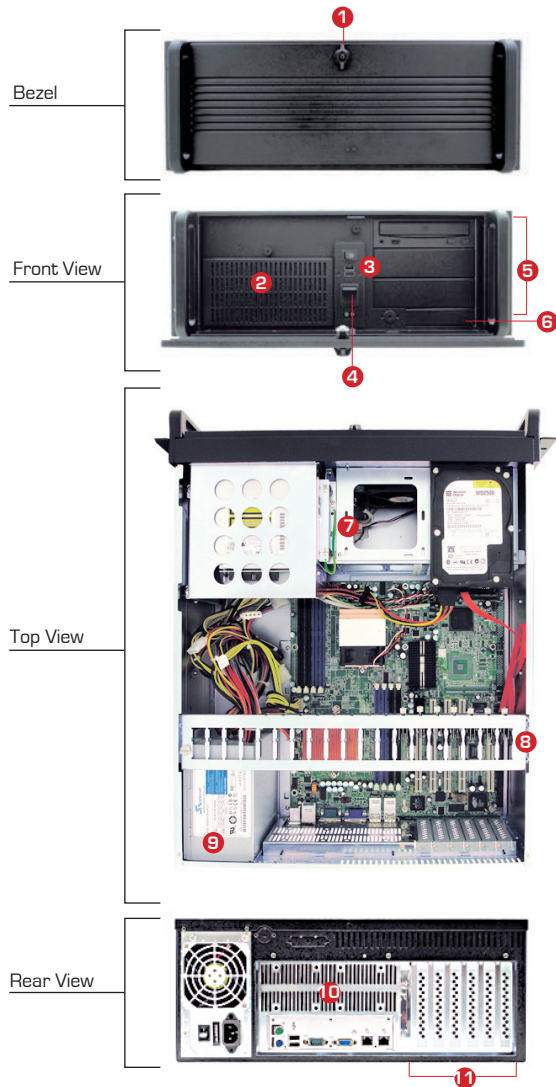

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Removable & washable air filter for dust-free server interior Superior cooling through front air intake
- 3 Front access dual USB port
- 4 Power on/off, system reset and LEDs for HDD & LAN
- 5 Three(3) external 5.25-inch bays supported
- 6 One(1) external 3.5-inch bay supported
- 7 Two(2) internal 3.5-inch HDD supported
- 8 Hold down bar to ensure that HBA cards are locked into positions
- 9 PS/2 size single or redundant power supply options
- 10 Two(2) rear fan slots for upgrade
- 11 Seven(7) PCI slots attribute to network expansion and scalability

| | |
|--|---|
| Model Number : RMC-4S-2 | |
| Order Information : RMC-4S-●-2▲ | |
| Industry Standard : EIA-RS310D | |
| Materials : Heavy-duty cold-rolled steel | |
| Finish : | Inside / Body : Zinc-plated with bright chromate |
| | Outside / Front : Texture-coated |
| Dimensions : (W x D x H) | mm : 482.6 x 505 x 177 |
| | inches : 19 x 20 x 7 |
| Cooling : | Front: 2 x 90mm fans (+ optional 2 x 60x25mm fans for exhaust) |
| Power Supply : | ● Descriptions |
| | 30T 300W AT |
| | 30X 300W ATX PFC |
| | 35E 350W EPS-12V PFC |
| | 40E 400W EPS-12V PFC |
| | 46E 460W EPS-12V PFC |
| Expansion : | 7 x PCI slots (full height, full length) or 14 x slots for backplane version |
| | Controls : Power on/off, system reset and dual USB ports |
| | Indicators : Power and HDD LED's |
| Speakers : 0.4W built-in | |

| | | | |
|--|---------------------|--|-----------------------------|
| System Board: | ▲ | Descriptions | |
| | | MB Version: Up to 12"(W) x 10.5"(D) size ATX/SSI CEB compliant MB (Optional 12"(W) x 13"(D) ATX/SSI EEB 3.6 compliant MB) | |
| | B1 | BP Version: (SBC) 14-slot | |
| | B2 | BP Version: (SBC) 20-slot | |
| Drive Bay : | External | 5.25" | 3 |
| | | 3.5" | 1 |
| | | 3.5" hot-swap | 0 |
| | | 2.5" hot-swap | 0 |
| | Internal | 3.5" | 2 (+ optional 2 x 3.5" HDD) |
| | Slim CD-Rom/DVD-Rom | | 0 |
| Slim FDD | | 0 | |
| Temperature : 0°C(32°F) ~ 50°C(122°F) | | | |
| Humidity : 5%~95% non-condensing | | | |
| Gross Weight (lbs) : 18 kgs / 39.6 lbs | | | |
| Packaging Dimension (W x D x H) : | | mm : 600 x 690 x 340 | |
| Cubic Feet : 5 | | | |
| Reference Container Loading : | 20' | 210 | |
| | 40' | 420 | |
| | 40' H | 470 | |
| Mounting Options : | BKT-2M-010-04400-G | BKT-2S-010-24200-F | |
| | SLR-20 | SLR-26 | |

Mechanical Drawing

